




FRO Series Reverse Osmosis Storage Tanks

Specifications

Model	Tank		Dimensions (inches)		Weight (lbs)
	Volume	Capacity	Diameter	Height	
FRO 122	3.2	2.5	9"	13¾"	7.5 lbs
FRO 132	4.4	3.2	10.9"	13¾"	9 lbs
FRO 1070	14	10.3	15.2"	22½"	24 lbs

Maximum working Pressure: 125 PSI • Connection: 1/4" stainless steel MPT • Pre-charge: 7 psig

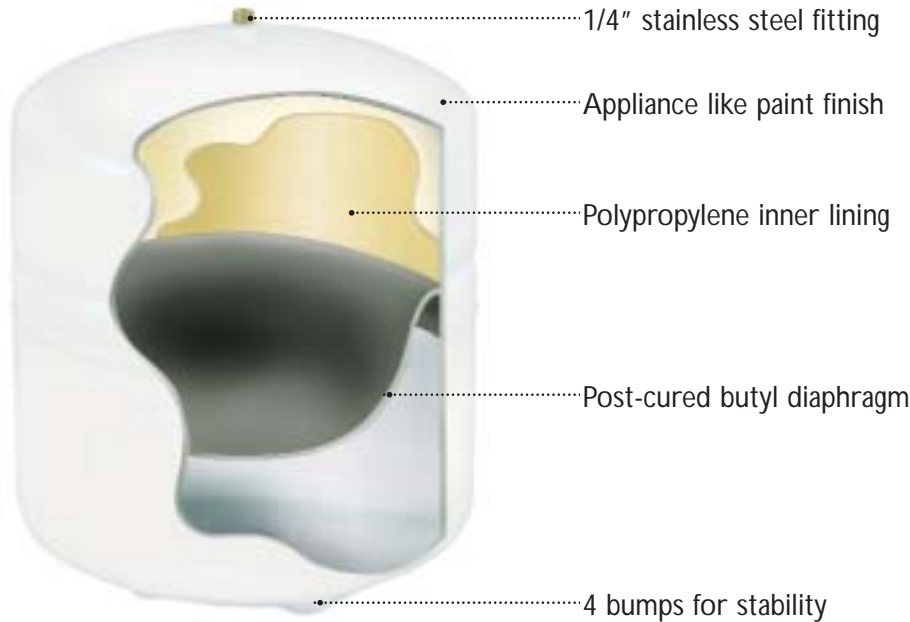

Model	Tank Precharge PSIG	Drawdownn Gallons @ Listed System Pressure					
		20	30	40	50	60	70
FRO 122	5	1.4	1.8	2.0	2.2	2.4	2.5
	10	0.9	1.4	1.8	2.0	2.1	2.3
FRO 132	5	1.9	2.5	2.8	3.1	3.2	3.4
	10	1.3	2.0	2.4	2.7	2.9	3.1
FRO 1070	5	6.0	7.8	9.0	9.7	10.3	10.7
	10	4.0	6.3	7.7	8.7	9.4	9.9

The H2 PRO Family:

- HTX Series
Hydronic Expansion Tanks
- WH Series
Thermal Expansion Tanks
- PH Series
Thermal Expansion Tanks
- PBS Series
Pressure Booster Systems
- SSI Series
Stainless Steel
Indirect Fired Water Heaters
- GLI Series
Glass Lined
Indirect Fired Water Heaters



Flexcon Industries
300 Pond Street
Randolph, Massachusetts 02368

For More Information
Call 1.781.986.2424
Fax 1.781.986.2029
www.flexconind.com

