



Submittal Data Information

OLC701

**Well-Rite *Online* Series
Diaphragm Well Tanks**

Job Name: _____

Location: _____


Schedule # _____

Contractor _____

Model Number _____

Quantity _____

Engineer _____

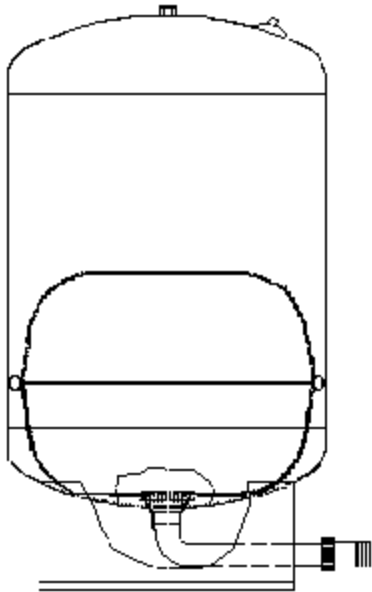

Materials of Construction

Shell	Cold rolled steel
Double Diaphragm	Butyl Rubber
Water Connection	Stainless steel tube
System Connection	Brass Union x MNPT
Shrader Valve	Brass

Ratings

Max. operating pressure	100 PSI
	125 PSI 26" sizes
Max. operating temperature	140 F



Manufactured by: Flexcon Industries
 300 Pond St 781.986.2424
 Randolph, MA 781.986.2029 Fax
www.flexconind.com

Model #'s	Dimensions				Volume		Connection	Precharge	Shipping Weight	
	Diameter		Height		gal.	liter			in.	PSI
	in.	cm.	in.	cm.						
WR45-OLC	16	40.64	22	55.88	14	60	1	28	28.0	12.7
WR60-OLC	16	40.64	29	73.66	20	80	1	28	36.0	16.3
WR80-OLC	16	40.64	34.5	87.63	26	100	1	28	41.0	18.6
WR100-OLC	21	53.34	27.75	70.48	32	120	1 1/4	28	54.0	24.5
WR120-OLC	16	40.64	42.75	108.58	33	130	1	28	49.0	22.2
WR140-OLC	21	53.34	36.25	92.07	44	170	1 1/4	38	67.0	30.4
WR200-OLC	21	53.34	48	121.92	62	240	1 1/4	38	82.0	37.2
WR240-OLC	21	53.34	62	157.48	81	310	1 1/4	38	99.0	44.9
WR260-OLC	26	66.04	44.5	113.03	85	325	1 1/4	38	121.0	54.9
WR360-OLC	26	66.04	59.75	150.49	119	450	1 1/4	38	153.0	69.5