

IN-WELL BY FLEXCON

MATERIALS OF CONSTRUCTION

- **Outer shell:** 5 gauge stainless steel / schedule 40 PVC
- **Water chambers:** Heavy-Duty 100% butyl rubber bladder
- **Testing:** High pressure, seam weld, helium, final precharge check
- **Air valve:** Brass valve with o-ring seal
- **Warranty:** Five year





DIMENSIONS & CAPACITIES

Flexcon Model	Former In-Well Model	Outer Shell Material	Total Volume (Gallons)	Max. Working Pressure/ Temperature	Dimensions		Shipping Weight	Load Capacity
					Dia	Length		
IWSS 4	NT-30SS	SS	3.5 Gal	124 psi/100F	3 5/8"	102"	32 lbs	7500 lbs
IWSS 5	NT-50SS	SS	4 Gal	125 psi/100F	4 1/2"	60"	34 lbs	7500 lbs
IWPL 4	PL-35	PVC	3.5 Gal	100 psi/74F	3 1/2"	116"	26 lbs	2000 lbs
IWPL 5	PL-45	PVC	4.25 Gal	100 psi/74F	4 1/2"	82"	26 lbs	2000 lbs

Tank pre-charge on IWSS models is 38 psig and 20psig on IWPL models. All tanks have a 1-1/4" FNPT connection.

TYPICAL INSTALLATIONS

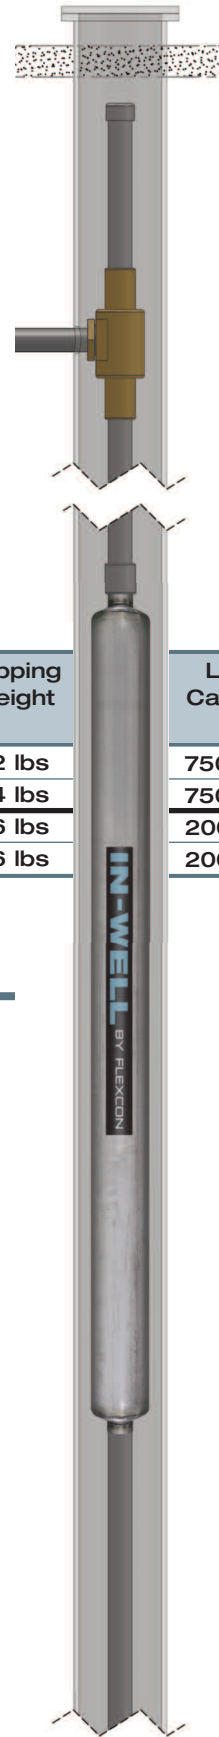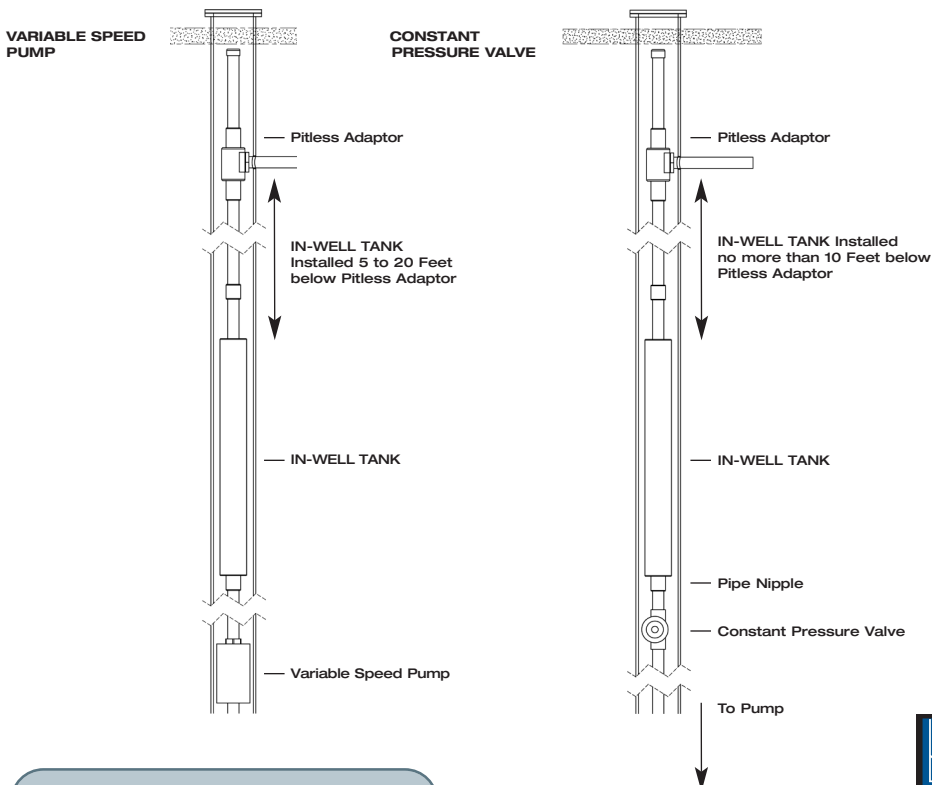

> www.flexconind.com
 > 781-986-2424
 > 300 Pond Street
 > Randolph, MA 02368



The Reliable Source®